

HEAVY DUTY POLYURETHANE TWIN WHEEL ON STAINLESS STEEL CASTOR


20

ISO 9001 : 2000 Certified Organisation

PLATE TYPE



Swivel

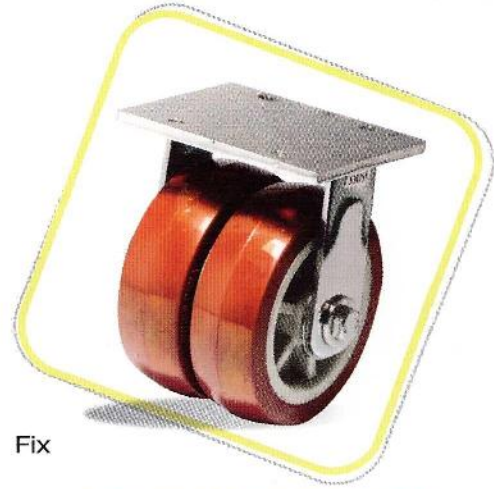

Fix



Brake

HEAVY DUTY CASTOR (BRACKET):

Heavy Duty Welded Stainless Steel (AISI 304) construction, Swivel or Fix bracket with double ball bearing in the swivel head. Additionally reinforced by the integration of four specially shaped & harness bearing sets. Lubrication swivel head sealing with grease nipple, Argon Arc welded very strong, bolted and secured central king pin, bolted wheel axle with self locking nut.

Model No.							Dynamic (Kg)	Static (Kg)
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
TWPU/5025/SSPLS	50	25 + 25	75 x 75	55 x 55	9	90	120	145
TWPU/6525/SSPLS	65	25 + 25	75 x 75	55 x 55	9	105	135	165
TWPU/7525/SSPLS	75	25 + 25	75 x 75	55 x 55	9	120	150	180
TWPU/7532/SSPLS	75	32 + 32	100 x 100	75 x 75	10	120	230	275
TWPU/7538/SSPLS	75	38 + 38	100 x 100	75 x 75	10	120	240	285
TWPU/10032/SSPLS	100	32 + 32	100 x 100	75 x 75	10	150	260	315
TWPU/10038/SSPLS	100	38 + 38	100 x 100	75 x 75	10	150	320	385
TWPU/10050/SSPLS	100	50 + 50	100 x 100	75 x 75	10	155	350	425
TWPU/12532/SSPLS	125	32 + 32	100 x 100	75 x 75	10	180	330	400
TWPU/12538/SSPLS	125	38 + 38	100 x 100	75 x 75	10	180	400	480
TWPU/12550/SSPLS	125	50 + 50	150 x 100	100 x 75	12	180	470	575
TWPU/15038/SSPLS	150	38 + 38	125 x 100	100 x 75	12	210	500	600
TWPU/15050/SSPLS	150	50 + 50	150 x 100	100 x 75	12	210	600	725
TWPU/20050/SSPLS	200	50 + 50	150 x 125	100 x 100	12	265	800	1000
TWPU/25050/SSPLS	250	50 + 50	150 x 150	125 x 125	12	325	1250	1500
TWPU/30050/SSPLS	300	50 + 50	150 x 150	125 x 125	12	370	1625	1850


HEAVY DUTY POLYURETHANE TWIN WHEEL ON STAINLESS STEEL CASTOR

PIN TYPE

ISO 9001 : 2000 Certified Organisation

21


Success in Motion...

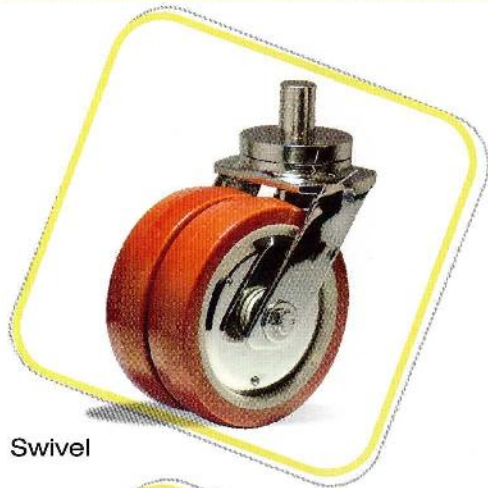

Swivel





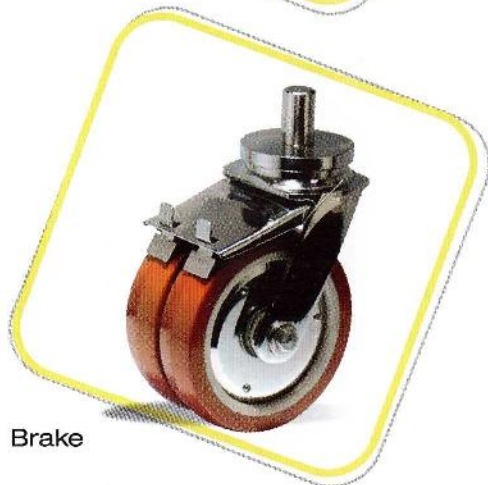




Fix




Brake

HEAVY DUTY CASTOR (BRACKET):

Heavy Duty Welded Stainless Steel (AISI 304) construction, Swivel or Fix bracket with double ball bearing in the swivel head. Additionally reinforced by the integration of four specially shaped & harness bearing sets. Lubrication swivel head sealing with grease nipple, Argon Arc welded very strong, bolted and secured central king pin, bolted wheel axle with self locking nut.

Model No.								Dynamic (Kg)	Static (Kg)
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)			
TWPU/5025/SSPIS	50	25 + 25	22	50	-	90	120	145	
TWPU/6525/SSPIS	65	25 + 25	22	50	-	105	135	165	
TWPU/7525/SSPIS	75	25 + 25	22	50	-	120	150	180	
TWPU/7532/SSPIS	75	32 + 32	22	50	-	120	230	275	
TWPU/7538/SSPIS	75	38 + 38	22	50	-	120	240	285	
TWPU/10032/SSIS	100	32 + 32	22	50	-	150	260	315	
TWPU/10038/SSPIS	100	38 + 38	22	50	-	150	320	385	
TWPU/10050/SSPIS	100	50 + 50	32	50	-	155	350	425	
TWPU/12532/SSPIS	125	32 + 32	22	50	-	180	330	400	
TWPU/12538/SSPIS	125	38 + 38	22	50	-	180	400	480	
TWPU/12550/SSPIS	125	50 + 50	32	50	-	180	470	575	
TWPU/15038/SSPIS	150	38 + 38	22	50	-	210	500	600	
TWPU/15050/SSPIS	150	50 + 50	32	50	-	210	600	725	
TWPU/20050/SSPIS	200	50 + 50	32	50	-	265	800	1000	
TWPU/25050/SSPIS	250	50 + 50	32	50	-	325	1250	1500	
TWPU/30050/SSPIS	300	50 + 50	32	50	-	370	1625	1850	

STUD TYPE

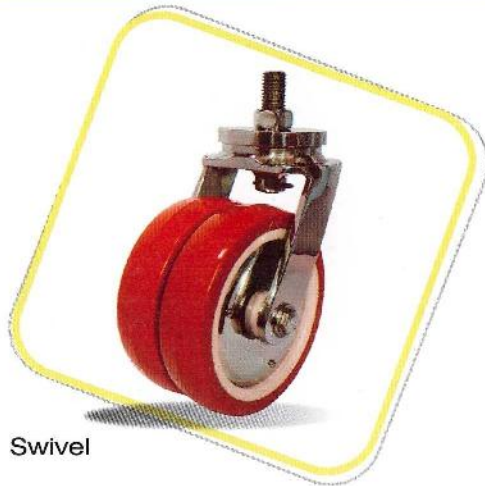


Swivel



Fix

HEAVY DUTY CASTOR (BRACKET)

Heavy Duty Welded Stainless Steel (AISI 304) construction, Swivel or Fix bracket with double ball bearing in the swivel head. Additionally reinforced by the integration of four specially shaped & harness bearing sets. Lubrication swivel head sealing with grease nipple, Argon Arc welded very strong, bolted and secured central king pin, bolted wheel axle with self locking nut.

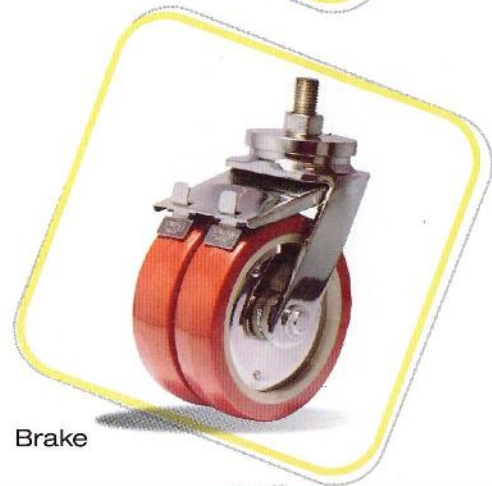

Brake

Model No.							Dynamic (Kg)	Static (Kg)
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
TWPU/5025/SSSTS	50	25 + 25	M 12	50	-	90	120	145
TWPU/6525/SSSTS	65	25 + 25	M 12	50	-	105	135	165
TWPU/7525/SSSTS	75	25 + 25	M 12	50	-	120	150	180
TWPU/7532/SSSTS	75	32 + 32	M 16	50	-	120	230	275
TWPU/7538/SSSTS	75	38 + 38	M 16	50	-	120	240	285
TWPU/10032/SSSTS	100	32 + 32	M 16	50	-	150	260	315
TWPU/10038/SSSTS	100	38 + 38	M 16	50	-	150	320	385
TWPU/10050/SSSTS	100	50 + 50	M 16	50	-	155	350	425
TWPU/12532/SSSTS	125	32 + 32	M 16	50	-	180	330	400
TWPU/12538/SSSTS	125	38 + 38	M 16	50	-	180	400	480
TWPU/12550/SSSTS	125	50 + 50	M 16	50	-	180	470	575
TWPU/15038/SSSTS	150	38 + 38	M 16	50	-	210	500	600
TWPU/15050/SSSTS	150	50 + 50	M 20	50	-	210	600	725
TWPU/20050/SSSTS	200	50 + 50	M 20	50	-	265	800	1000
TWPU/25050/SSSTS	250	50 + 50	M 20	50	-	325	1250	1500
TWPU/30050/SSSTS	300	50 + 50	M 20	50	-	370	1625	1850