

HEAVY DUTY POLYURETHANE WHEEL ON STAINLESS STEEL CASTOR

PLATE TYPE



Swivel



Fix



Brake

HEAVY DUTY CASTOR (BRACKET):

Heavy Duty Welded Stainless Steel (AISI 304) construction, Swivel or Fix bracket with double ball bearing in the swivel head. Additionally reinforced by the integration of four specially shaped & harness bearing sets. Lubrication swivel head sealing with grease nipple, Argon Arc welded very strong, bolted and secured central king pin, bolted wheel axle with self locking nut.

Model No.								
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	Dynamic (Kg)	Static (Kg)
HDP/5025/SSPLS	50	25	75 x 60	60 x 30	6	85	60	70
HDP/6525/SSPLS	65	25	75 x 65	54 x 43	8	100	68	80
HDP/7525/SSPLS	75	25	75 x 65	54 x 43	8	117	75	100
HDP/7532/SSPLS	75	32	75 x 75	55 x 55	9	117	115	150
HDP/7538/SSPLS	75	38	75 x 75	55 x 55	9	117	120	160
HDP/10032/SSPLS	100	32	75 x 75	55 x 55	9	145	130	170
HDP/10038/SSPLS	100	38	100 x 80	80 x 60	10	145	160	200
HDP/10050/SSPLS	100	50	100 x 100	75 x 75	10	145	180	250
HDP/12532/SSPLS	125	32	100 x 80	80 x 60	10	165	165	225
HDP/12538/SSPLS	125	38	100 x 80	80 x 60	10	165	200	260
HDP/12550/SSPLS	125	50	125 x 100	100 x 75	12	165	235	320
HDP/15038/SSPLS	150	38	125 x 100	100 x 75	12	195	250	350
HDP/15050/SSPLS	150	50	125 x 100	100 x 75	12	195	300	400
HDP/20050/SSPLS	200	50	125 x 125	100 x 100	12	255	400	500
HDP/25050/SSPLS	250	50	150 X 150	125 X 125	14	310	625	815
HDP/30050/SSPLS	300	50	150 X 150	125 X 125	14	350	815	1050

HEAVY DUTY POLYURETHANE WHEEL ON STAINLESS STEEL CASTOR


PIN TYPE



Swivel





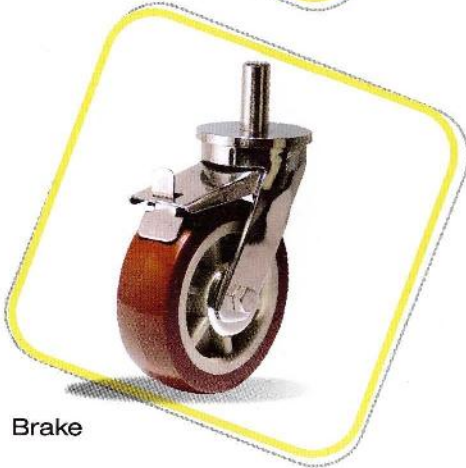



Fix



Brake

HEAVY DUTY CASTOR (BRACKET):

Heavy Duty Welded Stainless Steel (AISI 304) construction, Swivel or Fix bracket with double ball bearing in the swivel head. Additionally reinforced by the integration of four specially shaped & harness bearing sets. Lubrication swivel head sealing with grease nipple, Argon Arc welded very strong, bolted and secured central king pin, bolted wheel axle with self locking nut.

Model No.							Dynamic (Kg)	Static (Kg)
	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
HDPU/5025/SSPIS	50	25	22	50	-	85	60	70
HDPU/6525/SSPIS	65	25	22	50	-	100	68	80
HDPU/7525/SSPIS	75	25	22	50	-	117	75	100
HDPU/7532/SSPIS	75	32	22	50	-	117	115	150
HDPU/7538/SSPIS	75	38	22	50	-	117	120	160
HDPU/10032/SSIS	100	32	22	50	-	145	130	170
HDPU/10038/SSPIS	100	38	22	50	-	145	160	200
HDPU/10050/SSPIS	100	50	22	50	-	145	180	250
HDPU/12532/SSPIS	125	32	22	50	-	165	165	225
HDPU/12538/SSPIS	125	38	22	50	-	165	200	260
HDPU/12550/SSPIS	125	50	22	50	-	165	235	320
HDPU/15038/SSPIS	150	38	22	50	-	195	250	350
HDPU/15050/SSPIS	150	50	22	50	-	195	300	400
HDPU/20050/SSPIS	200	50	32	50	-	255	400	500
HDPU/25050/SSPIS	250	50	32	50	-	310	625	815
HDPU/30050/SSPIS	300	50	32	50	-	350	815	1050

HEAVY DUTY POLYURETHANE WHEEL ON STAINLESS STEEL CASTOR

STUD TYPE



Swivel



Fix



Brake

HEAVY DUTY CASTOR (BRACKET):

Heavy Duty Welded Stainless Steel (AISI 304) construction, Swivel or Fix bracket with double ball bearing in the swivel head. Additionally reinforced by the integration of four specially shaped & harness bearing sets. Lubrication swivel head sealing with grease nipple, Argon Arc welded very strong, bolted and secured central king pin, bolted wheel axle with self locking nut.

Model No.							Dynamic (Kg)	Static (Kg)
	(mm)	(mm)	(mm)	(mm)	(mm)			
HDP/5025/SSSTS	50	25	M 10	50	-	85	60	70
HDP/6525/SSSTS	65	25	M 10	50	-	100	68	80
HDP/7525/SSSTS	75	25	M 10	50	-	117	75	100
HDP/7532/SSSTS	75	32	M 12	50	-	117	115	150
HDP/7538/SSSTS	75	38	M 12	50	-	117	120	160
HDP/10032/SSSTS	100	32	M16	50	-	145	130	170
HDP/10038/SSSTS	100	38	M16	50	-	145	160	200
HDP/10050/SSSTS	100	50	M16	50	-	145	180	250
HDP/12532/SSSTS	125	32	M16	50	-	165	165	225
HDP/12538/SSSTS	125	38	M16	50	-	165	200	260
HDP/12550/SSSTS	125	50	M16	50	-	165	235	320
HDP/15038/SSSTS	150	38	M16	50	-	195	250	350
HDP/15050/SSSTS	150	50	M20	50	-	195	300	400
HDP/20050/SSSTS	200	50	M20	50	-	255	400	500
HDP/25050/SSSTS	250	50	M20	50	-	310	625	815
HDP/30050/SSSTS	300	50	M20	50	-	350	815	1050